

DAVID

SPREADING AND FERTILIZATION









EN



of the chain (normal and inverted gear).

height.







Hydralic speed

Special anti-wear

regulation of the

chain (normal and inverted gear).

Over-the-row spreader for manure application. Its high axle between the wheels allows to work on crops up to 87 cm high, such as V shape vineyards, sugar cane and all crops using a overthe-row tractor.

DEA



EE

Spreaders for organic solid fertilizers (manure). It reaches 15 mt when equipped with spreader disc.

Torque limitator in the hydraulic system against drive chain's overstress.

Automatic rear heightadjustable door with automatic closing when the transmision chain movement stops

Double subsoiler with

hydraulic extension.

of working depth and transport height.

Hydraulic adjustment



Heavy duty frame and robotic welding.

Height adjustable front support foot.

D COMMIT



5

MODELS





PROFEED

Professional spreader for organic solid fertilizers (manure). It fits external chains avoiding contact with manure. The machine spread up to 15m.



. . . .



Wide automatic slurry gate with double cylinders height adjustable with automatic closing when inside chains stop moving.

Tank for chain lubrication.



Draw-bar with fixed bar ring joint.

gear)





Ø1500mm

spreading disc.

Hydraulic and parking brake. chains made by special anti-wear steel and located outside the hopper.

High reinforced



Double engine on chain.

ACCESORIES AND OPTIONS FOR FRT



ACCESORIES AND OPTIONS FOR TRAILERS

	1	A		-	P.L			and the second s	Of a 2
	Simple subsoiler	Double subsoiler	Double subsoiler with chains	Subsoiler with unloading band	Cover furrows	Side unloading belt	Double lateral belt two falls	Ø700 Disc adaptable	Sonar
DEF	•	٠		٠	•	•	٠	•	•
ECOFEED	•	٠	•	٠	•	٠	٠	٠	•
DEA	•	•	•	•	•	•	•	•	•
SURFEED						٠	•	•	•
PROFEED									
			1					LANT.	

	coupling system	disc	spreader	+ colour screen 7"	compaction kit	Thee load runnp	bottom in stainless steel	frame	dispenser for microgranules application
DEF	•		•	•		•	•	•	
ECOFEED	•	٠	٠	٠	٠	•	•		•
DEA	•	•	•	•	٠	•	•		٠
SURFEED	•	•	•	•	•	•	•		•
PROFEED	•			•	•		•		•
-									

Manure anti-

Free fall ramp

Hopper and

Subsoiler

Additional

Camera

ERI


Automatic

Spreading

Double disc

The **Automatic Coupling** allows the fast connection and disconnection trailer tractor. Ideal for tractors equipped with front loader; Economy and Agility are ensured by loading the hopper using an only tractor.



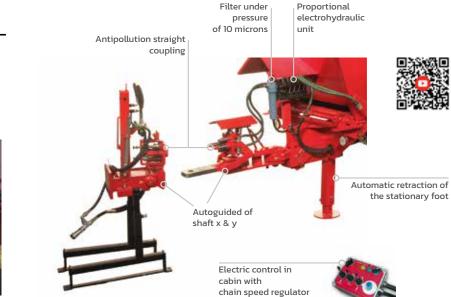

WHY CHOOSE OUR EQUIPMENT?

🛱 Versatility

- Simple and versatile equipment for fertilization in vineyards, orchards and open fields.
 - The widest range of equipment in the market for compost or inorganic fertilizers spreading onto vineyard, fruit tr and open fields.
- Different accessories that allow to distribute the fertilizer according to the crops needs.

Exclusivity

- A machine for 3 types of application: surfacely, localizely and subsoiling.
- The first and unique fertilizer spreader with 'automatic coupling system' (Option) to connect and disconnect the machine from the tractor cab in 4 seconds.
- Roller chain and special anti-wear steel for professional use to get high performances
- Modular construction system of the hopper. Allows substitutions of hopper sections in the event of breaks or dents. Serie PROFEED.

Effectiveness

- Low -power absorption and great maneuverability thanks to the elimination of PTO shaft.
- Magnificent work with any type of organic fertilizer. Magnificent crumbled and excellent cast.
- Constant and uniform dispensing indipendent from RPM or tractor's speed.

Serie FRT

- Time is valuable, it is possible to work up to 20 km/h with standard soil conditions by equipping electronic dosing system.
- Performance up to 260 kg / min.
- Speed of the discs up to 720 rpm.
- Its exclusive design allows to reach working widths from 1.6 to 18m.

🕘 Reliability

- Components and materials of hight quality.
- Low maintenance requested (no lubrication needed into essential parts)
- Manufacturing experience since 1973.

Serie FRT

- The plates, vanes, agitators, carter and the discs are made of stainless steel to guarantee its resistance and durability.
- Stainless steel outlets easily removable for cleaning and maintenance.
- Double hydraulic opening by a double acting cylinder.

Safety

- The electronic dosing system maintains constant application rate at different speed to optimize fertilizer quantity.
 Controlled release fertilizers can be used thanks to the adjustable double subsoiler, an effective solution for sustainable agriculture.
- The most consistent and sustainable option in the medium-long term for organic farming is the enhancement of soil properties and the use of composted fertilizers. These are the richest in carbon, slow release and humus precursors. Increase the organic matter level and, consequently, the biological activity means improving soil production capacity and resiliency.

🕑 Sustainability

The discs and spreader vanes are adjustable with high accuracy. All models are designed for simple and intuitives operations. Fully hydraulic operation in all its functions.

Serie FRT

The regulation of the opening of the hopper is composed of two independent indicators placed on a graduated scale, simple and visible.



SUSTAINABILITY

Our commitments

Respect and **honesty** are fundamental rules of ID David when dealing with customers, employees, suppliers and our planet. The company currently develops and promotes corporate social responsibility.

We believe in creating shared and lasting values with all *stakeholders*.

100% renewable power consumed in 2020

Our aim is to achieve **0%** CO2 emissions by 2025 through reforestation

100% electric vehicles for internal mobility

99% recycling of the generated waste



Tel.: +34 968 718 119 info@id-david.com







DAVID